


CHEMICAL NAME

Vinyldimethyl terminated dimethyl-methyltrifluoropropyl polysiloxane copolymers

CHEMICAL STRUCTURE

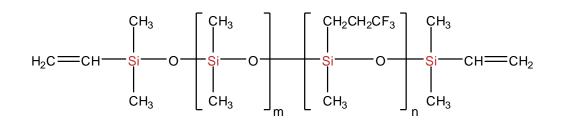

INTRODUCTION

SiSiB® VF6960 is a colorless transparent oil liquid, CAS number 68951-98-4.

TYPICAL PHYSICAL PROPERTIES

	Viscosity, 25°C	Volatile (200°C, 4h)	Boiling Point	Flash Point
VF6960-300	300cSt	<5%	>300°C	>260°C
VF6960-500	500cSt	<5%	>300°C	>270°C
VF6960-1000	1000cSt	<5%	>300°C	>300°C

APPLICATIONS

SiSiB® VF6960 is used for defoaming agent, lubricating oil, and grease which can improve the corrosion resistance and solvent resistance.

SiSiB® VF6960 is also used as efficient defoaming agent and fabric finishing agent for spin printing and dyeing, which provides smaller surface tension, lower refractive index, and oil resistance and water resistance.

PACKING AND STORAGE

Power Chemical IS09001 IS014001 certificated Copyright© 2008 Power Chemical Corporation Ltd. SiSiB® is a registered trademark of PCC. For more knowledge regarding organosilanes, you may visit www.SiSiB.com or www.PCC.asia



SiSiB® VF6960 is supplied in 5Kg drums, 10Kg drums, and 20Kg drums.

In the original unopened packaging, SiSiB® VF6960 has a shelf life of 12 months.

Notes

All information in the leaflet is based on our present knowledge and experience. We reserve the right to make any changes according to technological progress or further developments. Performance of the product described herein should be verified by testing.

We specifically disclaim any other express or implied warranty of fitness for a particular purpose or merchantability. We disclaim liability for any incidental or consequential damages.

Please send all technical questions concerning quality and product safety to: support@SiSiB.com.

Power Chemical IS09001 IS014001 certificated

Copyright© 2008 Power Chemical Corporation Ltd. SiSiB® is a registered trademark of PCC. For more knowledge regarding organosilanes, you may visit www.SiSiB.com or www.PCC.asia